

WaterBetter® Filter Housings

Single Cartridge Design

Lower Operation Cost

- Harmsco® WB WaterBetter® single-cartridge filters deliver high flow, extended filter life, increased dirt holding capacity and ease of operation.



Certified to
ANSI-NSF 61

Features

- ▶ Patented Up-flow design
- ▶ Electropolished 304 stainless steel housing
- ▶ Fail Safe closure system
- ▶ Three sizes for greater media surface area
- ▶ CPVC standpipe (standard) - stainless steel optional
- ▶ Simple alternative to complex multiple cartridge housings
- ▶ Extensive choice of cartridge micron ratings and media, including carbon block
- ▶ Reduced installation cost



Applications

- ▶ Commercial/Residential Drinking Water
- ▶ Cooling Tower Filtration
- ▶ Desalination Pre-filtration (coated option)
- ▶ Surface Water Treatment Rule (SWTR) LT2
- ▶ P.O.E. for household
- ▶ Industrial Waste Water Treatment
- ▶ Reverse Osmosis Pre-filtration
- ▶ Ground Water Remediation
- ▶ Utility Water
- ▶ Ground Water Under Direct Influence (GUDI)



Cartridge Selection

Sediment Removal
Turbidity Reduction
Chlorine Removal
Taste & Odor Reduction
Cyst Removal
Pre-Filtration
Post-Filtration
Antimicrobial
Absolute Rated
Nominal Rated
100% Synthetic
Non Potable Use Only
Course Filtration
High Temperature
All Polypropylene
NSF Listed
Cleanable/ Reuseable

Hurricane® Cartridge Family

Polyester-Plus™ - engineered for high efficiency, low pressure drops; NSF 61 Listed

HC/40-0.35	Hur 40 Cartridge - 0.35 Micron	●	●																●	
HC/40-1	Hur 40 Cartridge - 1 Micron	●	●																●	
HC/40-5	Hur 40 Cartridge - 5 Micron	●	●																●	●
HC/40-10	Hur 40 Cartridge - 10 Micron	●	●																●	●
HC/40-20	Hur 40 Cartridge - 20 Micron	●	●																●	●
HC/40-50	Hur 40 Cartridge - 50 Micron	●	●																●	●
HC/40-100	Hur 40 Cartridge - 100 Micron	●	●																●	●
HC/40-150	Hur 40 Cartridge - 150 Micron	●	●																●	●
HC/90-0.35	Hur 90 Cartridge - 0.35 Micron	●	●																●	
HC/90-1	Hur 90 Cartridge - 1 Micron	●	●																●	
HC/90-5	Hur 90 Cartridge - 5 Micron	●	●																●	●
HC/90-10	Hur 90 Cartridge - 10 Micron	●	●																●	●
HC/90-20	Hur 90 Cartridge - 20 Micron	●	●																●	●
HC/90-50	Hur 90 Cartridge - 50 Micron	●	●																●	●
HC/90-100	Hur 90 Cartridge - 100 Micron	●	●																●	●
HC/90-150	Hur 90 Cartridge - 150 Micron	●	●																●	●
HC/170-0.35	Hur 170 Cartridge - 0.35 Micron	●	●																●	
HC/170-1	Hur 170 Cartridge - 1 Micron	●	●																●	
HC/170-5	Hur 170 Cartridge - 5 Micron	●	●																●	●
HC/170-10	Hur 170 Cartridge - 10 Micron	●	●																●	●
HC/170-20	Hur 170 Cartridge - 20 Micron	●	●																●	●
HC/170-50	Hur 170 Cartridge - 50 Micron	●	●																●	●
HC/170-100	Hur 170 Cartridge - 100 Micron	●	●																●	●
HC/170-150	Hur 170 Cartridge - 150 Micron	●	●																●	●

High Temperature - up to 200°F (93°C)* *250°F (121°C) with metal end caps, using suffix "HTM"

HC/40-20HT	Hur 40 Cartridge - 20 Micron High Temp	●	●																●	
HC/40-50HT	Hur 40 Cartridge - 50 Micron High Temp	●	●																●	
HC/90-5CPHT	Hur 90 Cartridge - 5 Micron High Temp	●	●																●	●
HC/90-5HT	Hur 90 Cartridge - 5 Micron High Temp	●	●																●	●
HC/90-10HT	Hur 90 Cartridge - 10 Micron High Temp	●	●																●	●
HC/90-20HT	Hur 90 Cartridge - 20 Micron High Temp	●	●																●	●
HC/90-50HT	Hur 90 Cartridge - 50 Micron High Temp	●	●																●	●
HC/170-5CPHT	Hur 170 Cartridge - 5 Micron High Temp	●	●																●	●
HC/170-5HT	Hur 170 Cartridge - 5 Micron High Temp	●	●																●	●
HC/170-10HT	Hur 170 Cartridge - 10 Micron High Temp	●	●																●	●
HC/170-20HT	Hur 170 Cartridge - 20 Micron High Temp	●	●																●	●
HC/170-50HT	Hur 170 Cartridge - 50 Micron High Temp	●	●																●	●

Harmsco-Free - 100% synthetic composite media; NSF 61 Listed

HC/40-1W-HF	Hur 40 Cartridge - 1 Micron	●	●																●	
HC/40-5W-HF	Hur 40 Cartridge - 5 Micron	●	●																●	●
HC/40-20W-HF	Hur 40 Cartridge - 20 Micron	●	●																●	●
HC/90-1W-HF	Hur 90 Cartridge - 1 Micron	●	●																●	
HC/90-5W-HF	Hur 90 Cartridge - 5 Micron	●	●																●	●
HC/90-20W-HF	Hur 90 Cartridge - 20 Micron	●	●																●	●
HC/170-1W-HF	Hur 170 Cartridge - 1 Micron	●	●																●	●
HC/170-5W-HF	Hur 170 Cartridge - 5 Micron	●	●																●	●
HC/170-20W-HF	Hur 170 Cartridge - 20 Micron	●	●																●	●

Poly-Pleat™ - 1 micron absolute, multi-layered media; NSF 61 Listed

PP-HC-40-1	Poly Pleat Hur 40 Cartridge - 1 Micron	●	●																●	
PPFS-HC-40-1	PP-Fail Safe Hur 40 Cartridge - 1 Micron	●	●																●	
PP-HC-90-1	Poly Pleat Hur 90 Cartridge - 1 Micron	●	●																●	
PPFS-HC-90-1	PP-Fail Safe Hur 90 Cartridge - 1 Micron	●	●																●	
PP-HC-170-1	Poly Pleat Hur 170 Cartridge - 1 Micron	●	●																●	
PPFS-HC-170-1	PP-Fail Safe Hur 170 Cartridge - 1 Micron	●	●																●	

All-Poly - 100% polypropylene media with polypropylene end caps and components; also available in 10, 20 and 50 micron ratings

HC-PP-40-0.2	Hur 40 High Purity Pleated PP - 0.2 Mic	●	●																●	
HC-PP-40-0.45	Hur 40 High Purity Pleated PP - 0.45 Mic	●	●																●	
HC-PP-40-1	Hur 40 High Purity Pleated PP - 1 Mic	●	●																●	
HC-PP-40-5	Hur 40 High Purity Pleated PP - 5 Mic	●	●																●	
HC-PP-90-0.2	Hur 90 High Purity Pleated PP - 0.2 Mic	●	●																●	
HC-PP-90-0.45	Hur 90 High Purity Pleated PP - 0.45 Mic	●	●																●	
HC-PP-90-1	Hur 90 High Purity Pleated PP - 1 Mic	●	●																●	
HC-PP-90-5	Hur 90 High Purity Pleated PP - 5 Mic	●	●																●	
HC-PP-170-0.2	Hur 170 High Purity Pleated PP - 0.2 Mic	●	●																●	
HC-PP-170-0.45	Hur 170 High Purity Pleated PP - 0.45 Mic	●	●																●	
HC-PP-170-1	Hur 170 High Purity Pleated PP - 1 Mic	●	●																●	
HC-PP-170-5	Hur 170 High Purity Pleated PP - 5 Mic	●	●																●	

40 90 170

Sediment Removal
Turbidity Reduction
Chlorine Removal
Taste & Odor Reduction
Cyst Removal
Pre-Filtration
Post-Filtration
Antimicrobial Rated
Absolute Rated
Nominal Rated
100% Synthetic
Non Potable Use Only
Course Filtration
High Temperature
All Polypropylene
NSF Listed
Cleanable/ Reusable

SureSafe™ Antimicrobial - reduces growth of bacteria and mold on media

HC/40-20-AM	Hur 40 Cartridge - 20 Micron	●	●				●												●
HC/40-50-AM	Hur 40 Cartridge - 50 Micron	●	●				●												●
HC/90-20-AM	Hur 90 Cartridge - 20 Micron	●	●				●												●
HC/90-50-AM	Hur 90 Cartridge - 50 Micron	●	●				●												●
HC/170-20-AM	Hur 170 Cartridge - 20 Micron	●	●				●												●
HC/170-50-AM	Hur 170 Cartridge - 50 Micron	●	●				●												●

Carbon Block - includes pleated 5 micron nominal pre-filtration

HC/40-AC-5	Hur 40 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●						●								●
HC/90-AC-5	Hur 90 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●						●								●
HC/170-AC-5	Hur 170 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●						●								●

EZ Clean - 100% synthetic composite 50 micron media

HC/40-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●								●	●							●
HC/90-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●								●	●							●
HC/170-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●								●	●							●

Poly-Mesh - 100% synthetic composite 250 micron media

HC/170-PM	Hur 170 Cartridge Poly Mesh - 250 Micron	●	●								●	●							●
-----------	--	---	---	--	--	--	--	--	--	--	---	---	--	--	--	--	--	--	---

Note: WaterBetter® Single Cartridge Filters Use Hurricane® Cartridges

Cartridge Sizing Guide

Cleanable/ Reusable Hurricane® cartridges are cleanable and reusable in most applications and micron ratings (5 micron and up).

For Harmsco® Hurricane® and WaterBetter® Single-cartridge Filter Housings

Harmsco® recommends operation at 70% of maximum flow rate for optimum performance.

Polyester-Plus™, High Temp, Harmsco-Free, SureSafe™, EZ Clean, Poly-Mesh

Filter Model	Pleated Media Area (sq.ft.)	Length (in.)	O.D. (in.)	Max Flow Rate (GPM)	Recommended Flow Rate (GPM)	Max Flow Rate (LPM)	Max Flow Rate (M ³ /HR)	No./ Case	Carton Size
WB 40SC-2*	40	9-5/8	7-3/4	Up to 50	35	Up to 189	Up to 12	1	9x9x11
WB 90SC-2*	90	19-1/2	7-3/4	Up to 100	70	Up to 378	Up to 24	1	9x9x21
WB 170SC-2*	170	30-3/4	7-3/4	Up to 150	105	Up to 568	Up to 36	1	9x9x32

Poly-Pleat™

WB 40SC-2*	25	9-5/8	7-3/4	-	15	-	-	1	9x9x11
WB 90SC-2*	50	19-1/2	7-3/4	-	25	-	-	1	9x9x21
WB 170SC-2*	100	30-3/4	7-3/4	-	50	-	-	1	9x9x32

All-Poly

WB 40SC-2*	25	9-5/8	7-3/4	25	17	19	Up to 12	1	9x9x11
WB 90SC-2*	50	19-1/2	7-3/4	50	35	38	Up to 24	1	9x9x21
WB 170SC-2*	75	30-3/4	7-3/4	100	60 ^a	76	Up to 36	1	9x9x32


Carbon Block

WB 40SC-2*	25	9-5/8	7-3/4	-	5 ^b	-	-	1	9x9x11
WB 90SC-2*	55	19-1/2	7-3/4	-	10 ^b	-	-	1	9x9x21
WB 170SC-2*	90	30-3/4	7-3/4	-	15 ^b	-	-	1	9x9x32

^a based on 1, 5, 10, 20 and 50 micron ratings

*"2" represents 2 inch inlet/outlet pipe size; use "1" for 1 inch (not NSF Listed)

^b recommended flow for maximum chlorine removal

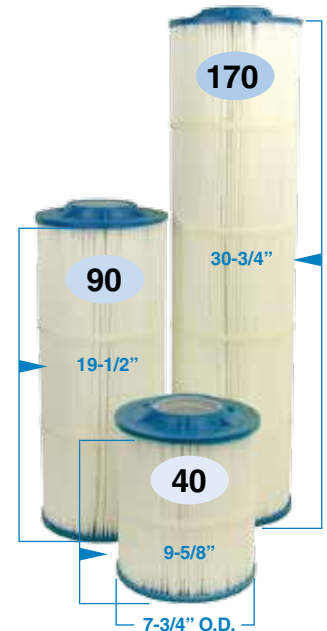


Hurricane® Cartridges
Length and O.D.

Cartridge Sizing Guide

Media Options

Polyester-Plus™



NSF 61 Listed

High Temperature



Harmsco-Free



NSF 61 Listed

Poly-Pleat™ (multi-layer)



NSF 61 Listed

All-Poly (multi-layer)



SureSafe™ (antimicrobial)



Carbon Block (5 Micron Pleated Pre-filter)




EZ Clean



Poly-Mesh



cartridges in the industry for all your filtration needs.

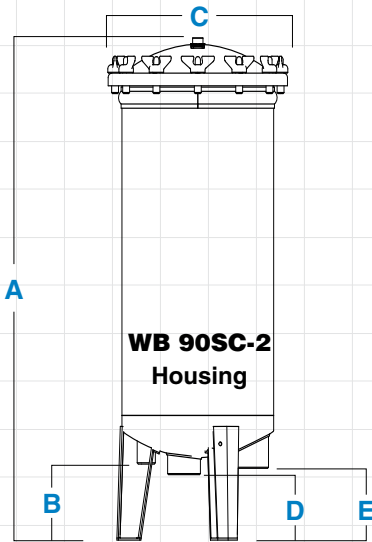

WB 40SC-2



WB 90SC-2



WB 170SC-2

Ordering Information

Filter Model	A Filter Height	B Drain	C Diameter	D Outlet	E Inlet	Pipe Size NPT	Drain Size NPT	Floor Space	Service Ht.	Shipping Wt. Lbs.	Carton Size In.
WB 40SC-1*	19-1/4"	4-1/2"	13"	3-7/8"	4-1/4"	1"	1"	15"x15"	31"	40	14x16x21
WB 40SC-2	19-1/4"	4-1/2"	13"	3-7/8"	4-1/4"	2"	1"	15"x15"	31"	40	14x16x21
WB 90SC-1*	29-3/8"	4-1/2"	13"	3-7/8"	4-1/4"	1"	1"	15"x15"	51"	51	14x16x38
WB 90SC-2	29-3/8"	4-1/2"	13"	3-7/8"	4-1/4"	2"	1"	15"x15"	51"	51	14x16x38
WB 170SC-1*	39-1/8"	4-1/2"	13"	3-7/8"	4-1/4"	1"	1"	15"x15"	72"	64	14x16x42
WB 170SC-2	39-1/8"	4-1/2"	13"	3-7/8"	4-1/4"	2"	1"	15"x15"	72"	64	14x16x42




*For 1" plumbing; not NSF Listed.

Filter Specifications

- ▶ Electropolished 304 stainless steel
- ▶ Standpipe - CPVC
- ▶ Temperature - 140°F (60°C) max. Up to 200°F (93°C) with optional stainless steel standpipe and high temperature cartridges installed
- ▶ Pressure - 150 psi (10 bar) max.
- ▶ Wing nuts - brass
- ▶ Rim gaskets - EPDM (Buna-N, Viton available)
- ▶ BSTP optional

All stainless steel housings are 304; 316 available upon request. Stainless steel standpipe for high temperature also available.

Pressure Drop

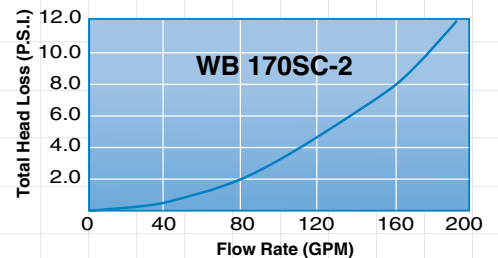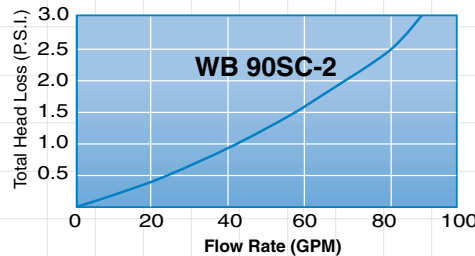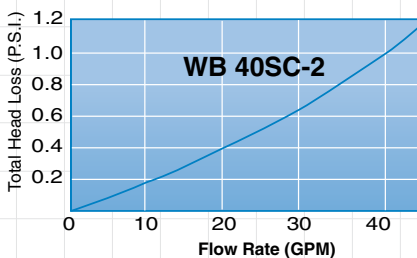

The total head loss data shown above was developed by NSF International and indicates pressure drop with WaterBetter® filter housings and 20 micron filter cartridges in clean water.

For additional information, please refer to the "Installation & Operation Manual" for WaterBetter® Filters.

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



HARMSCO® Filtration Products

P.O. Box 14066, North Palm Beach, FL 33408

(561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

www.harmsco.com



Made in USA

© Harmsco, Inc. 05C 33 7/11